

GLOW Interferometry Tutorial: Wednesday

We will reduce the 3C129 polarization continuum dataset from the 2008 NRAO summer school. (See <http://casa.nrao.edu/Tutorial/Slworkshop2008/>) The summer school used CASA for the data reduction. You are welcome to try to use CASA for the data reduction on your own (but see also the warnings about what to do what CASA crashes frequently), but we will do the basic reduction in AIPS.

2010 Nov 16: JMA updated for 31DEC10 AIPS

Web Image of 3C129



Wide-field 90 cm image of the large head-tail radio galaxy 3C129 (right). The bright source at the left is 3C129.1. From Lane et al., AJ, 123, 2985, 2002.

The 8.5 GHz observations being reduced here will only look at the central, brightest, portion of this source.

Data Reduction

Remember, the purpose of this exercise is not to teach you how to reduce radio interferometry data with AIPS. Consider all of the arcane incantations below as just that, magic incantations. You should instead try to figure out what each step is actually doing to the data. The [AIPS Cookbook](#) has quite a bit of information to help guide you. Check out chapters 4 and 5. (Note that you probably have a copy of the cookbook in your local AIPS installation if you don't have full web access.) However, at some of the most important points, the cookbook is relatively useless for **understanding what is going on**, as opposed to knowing which buttons to push, so ask your tutorial leader for help in this area.

Download the data from <http://casa.nrao.edu/Data/VLA/3C129/3c129data.tgz> and untar it in some directory. (If you are in Garching, there should be a local copy. Ask Sven.) Then, from that same directory, start aips. Login with a new user ID number.

Basic Environment

```
dowait 1
dohist=1
docrt=132
dotv=1
```

Load the raw data: FILLM

```
task 'fillm'
default
nfiles 0
prtlev 0
datain 'PWD:AT166_
doconcat true
clron
doweight 10
ncount 3
cparm(4)=28
cparm(8)=10./60
dparm 0
bparm 0
timer 0
vlamode = ' '
band = ' '
calcode ' '
clron
outdisk 1
go
```

Check where it went. You will need the X band version at 8.5 GHz

Note that there are multiple sequence numbers for the same bands, as the observation was done using different frequency settings. We want the initial 8.5 GHz observation.

```
indi 1
pcat
getn 3
imhe
```

```
AIPS 1: Got(1)   disk= 1  user= 100   type=UV   19940725.X BAND.2
AIPS 1: Image=MULTI      (UV)          Filename=19940725   .X BAND.   2
AIPS 1: Telescope=VLA                      Receiver=VLA
AIPS 1: Observer=AT166                     User #= 100
AIPS 1: Observ. date=25-JUL-1994          Map date=16-NOV-2010
AIPS 1: # visibilities 284570             Sort order  TB
AIPS 1: Rand axes: UU-L-SIN  VV-L-SIN  WW-L-SIN  BASELINE  TIME1
AIPS 1:                SOURCE  FREQSEL
AIPS 1: -----
AIPS 1: Type      Pixels  Coord value      at Pixel      Coord incr  Rotat
AIPS 1: COMPLEX      3    1.0000000E+00      1.00    1.0000000E+00    0.00
AIPS 1: STOKES       4   -1.0000000E+00      1.00   -1.0000000E+00    0.00
AIPS 1: FREQ         1    8.5149000E+09      1.00    5.0000000E+07    0.00
AIPS 1: IF           2    1.0000000E+00      1.00    1.0000000E+00    0.00
```

```

AIPS 1: RA          1    00 00 00.000      1.00      3600.000      0.00
AIPS 1: DEC          1    00 00 00.000      1.00      3600.000      0.00
AIPS 1: -----
AIPS 1: Coordinate equinox 1950.00
AIPS 1: Maximum version number of extension files of type HI is 1
AIPS 1: Maximum version number of extension files of type AN is 1
AIPS 1: Maximum version number of extension files of type NX is 1
AIPS 1: Maximum version number of extension files of type SU is 1
AIPS 1: Maximum version number of extension files of type FQ is 1
AIPS 1: Maximum version number of extension files of type CL is 1
AIPS 1: Maximum version number of extension files of type TY is 1
AIPS 1: Maximum version number of extension files of type OF is 1
AIPS 1: Keyword = 'CORRMODE' value = '
AIPS 1: Keyword = 'VLAIIFS ' value = 'ABCD '
AIPS 1: Keyword = 'CORRCOEF' value = -1

```

Print out some useful information

```

task 'listr'
default
getn 3
optype 'scan'
doweight 1
docrt=132
flagver 0
sources ' '
stokes ' '
docalib 0
gainuse 1
dopol -1
dparm 0
antenna 0
basel 0
stokes ' '
inext ' '
inver 0
bif 0
eif 0
uvrange 0
go

```

```

vlb054   LISTR(31DEC10)    100    16-NOV-2010  17:47:48    Page    1
File = 19940725    .X BAND.    2 Vol = 1  Userid = 100
Freq = 8.514900000 GHz  Ncor = 4   No. vis = 284570
Scan summary listing

Scan      Source      Qual  Calcode  Sub      Timerange      FrqID
START VIS  END VIS
  1 2345-167      : 0002  A        1  0/07:38:45 - 0/07:41:35    1
1      5236

```

2	A2597	:	0002	1	0/07:53:05	-	0/08:00:15	1
5237	18977							
3	2345-167	:	0002 A	1	0/08:19:15	-	0/08:20:55	1
18978	22007							
4	A2597	:	0002	1	0/08:32:25	-	0/08:39:35	1
22008	35677							
5	2345-167	:	0002 A	1	0/08:58:25	-	0/09:00:15	1
35678	39018							
6	A2597	:	0002	1	0/09:11:35	-	0/09:18:55	1
39019	53084							
7	2345-167	:	0002 A	1	0/09:37:45	-	0/09:39:35	1
53085	56355							
8	A2597	:	0002	1	0/09:50:55	-	0/09:58:15	1
56356	70435							
9	2345-167	:	0002 A	1	0/10:17:05	-	0/10:18:55	1
70436	73790							
10	A2597	:	0002	1	0/10:30:15	-	0/10:37:35	1
73791	87870							
11	2345-167	:	0002 A	1	0/10:56:25	-	0/10:58:15	1
87871	91211							
12	A2597	:	0002	1	0/11:09:35	-	0/11:16:55	1
91212	105291							
13	2345-167	:	0002 A	1	0/11:35:45	-	0/11:37:35	1
105292	108646							
14	0420+417	:	0002 B	1	0/11:46:35	-	0/11:48:15	1
108647	111676							
15	3C129	:	0002	1	0/12:02:35	-	0/12:12:45	1
111677	131281							
16	0420+417	:	0002 B	1	0/12:25:25	-	0/12:27:15	1
131282	134636							
17	3C129	:	0002	1	0/12:39:45	-	0/12:49:55	1
134637	154172							
18	0420+417	:	0002 B	1	0/13:02:35	-	0/13:04:25	1
154173	157527							
19	3C129	:	0002	1	0/13:18:45	-	0/13:28:55	1
157528	175547							
20	0420+417	:	0002 B	1	0/13:41:35	-	0/13:43:25	1
175548	178625							
21	3C129	:	0002	1	0/13:55:55	-	0/14:06:05	1
178626	196645							
22	0420+417	:	0002 B	1	0/14:18:45	-	0/14:20:35	1
196646	199665							
23	3C129	:	0002	1	0/14:34:55	-	0/14:45:05	1
199666	216239							
24	0420+417	:	0002 B	1	0/14:57:45	-	0/14:59:35	1
216240	219330							
25	3C129	:	0002	1	0/15:10:55	-	0/15:18:15	1
219331	231264							
26	0420+417	:	0002 B	1	0/15:28:05	-	0/15:29:55	1
231265	234102							

```

 27 3C129      : 0002      1 0/15:44:45 - 0/15:54:55      1
234103      250648
 28 0420+417   : 0002  B    1 0/16:08:05 - 0/16:09:55      1
250649      253428
 29 3C129      : 0002      1 0/16:24:35 - 0/16:34:45      1
253429      269933
 30 0420+417   : 0002  B    1 0/16:47:35 - 0/16:49:25      1
269934      273011
 31 0518+165   : 0002  C    1 0/17:03:05 - 0/17:06:25      1
273012      278789
 32 0134+329   : 0002  C    1 0/17:18:15 - 0/17:21:35      1
278790      284570
Type Q to stop, just hit RETURN to continue

```

```

vlb054  LISTR(31DEC10)  100    16-NOV-2010 17:48:06    Page    2
File = 19940725    .X BAND.    2 Vol = 1  Userid = 100

```

Source summary

Velocity type = ' ' Definition = ' '

ID	Source	Qual	Calcode	RA(1950.0)	Dec(1950.0)	IFlux
1	2345-167	: 0002	A	23:45:27.6823	-16:47:52.600	0.000
	0.000 0.000 0.000					
	24929					
	IF(2)					0.000
	0.000 0.000 0.000					
2	A2597	: 0002		23:22:43.7000	-12:23:56.000	0.000
	0.000 0.000 0.000					
	83717					
	IF(2)					0.000
	0.000 0.000 0.000					
3	0420+417	: 0002	B	04:20:27.9370	41:43:08.045	0.000
	0.000 0.000 0.000					
	27625					
	IF(2)					0.000
	0.000 0.000 0.000					
4	3C129	: 0002		04:45:31.6950	44:55:19.950	0.000
	0.000 0.000 0.000					
	136740					
	IF(2)					0.000
	0.000 0.000 0.000					
5	0518+165	: 0002	C	05:18:16.5320	16:35:26.900	0.000
	0.000 0.000 0.000					
	5778					
	IF(2)					0.000
	0.000 0.000 0.000					
6	0134+329	: 0002	C	01:34:49.8320	32:54:20.520	0.000
	0.000 0.000 0.000					
	5781					
	IF(2)					0.000
	0.000 0.000 0.000					

ID	Source	Freq(GHz)	Velocity(Km/s)	Rest freq (GHz)
1	All Sources	8.5149	0.0000	0.0000
	IF(2)	8.8851	0.0000	0.0000

Frequency Table summary

FQID	IF#	Freq(GHz)	BW(kHz)	Ch.Sep(kHz)	Sideband
1	1	8.51490000	50000.0039	50000.0039	1
	2	8.88510000	50000.0039	50000.0039	1

AIPS 1: Resumes

Where are the antennas located?

go prtan

Location Of VLA Antennas

```

N36 (26)
N32 ( 1)
N28 (19)
N24 (11)
N20 (15)
N16 (25)
N12 (13)
N8  (27)
N4  (14)
(12) W4   E4 (22)
( 8) W8   E8 ( 4)
( 3) W12  E12 (16)
(28) W16  E16 ( 7)
( 2) W20  E20 (17)
(21) W24  E24 (24)
(10) W28  E28 ( 5)
(18) W32  E32 (23)
(20) W36  E36 ( 6)

VLA:_OUT ( 9)
VPT:_OUT (29)

```

Investigate the data

Plots

```


task 'uvplt'
source '0518+165', ' '
calcode ' '
stokes 'half'
timer 0
uvrange 0
bif 0
eif 0
docalib 0

```


```
gainuse 1
bparm 0 1
aparm 0
refant 22
do3col 1
dotv 1
tvinit
go
```



```
source '0134+329', ' '
tvinit
go
```

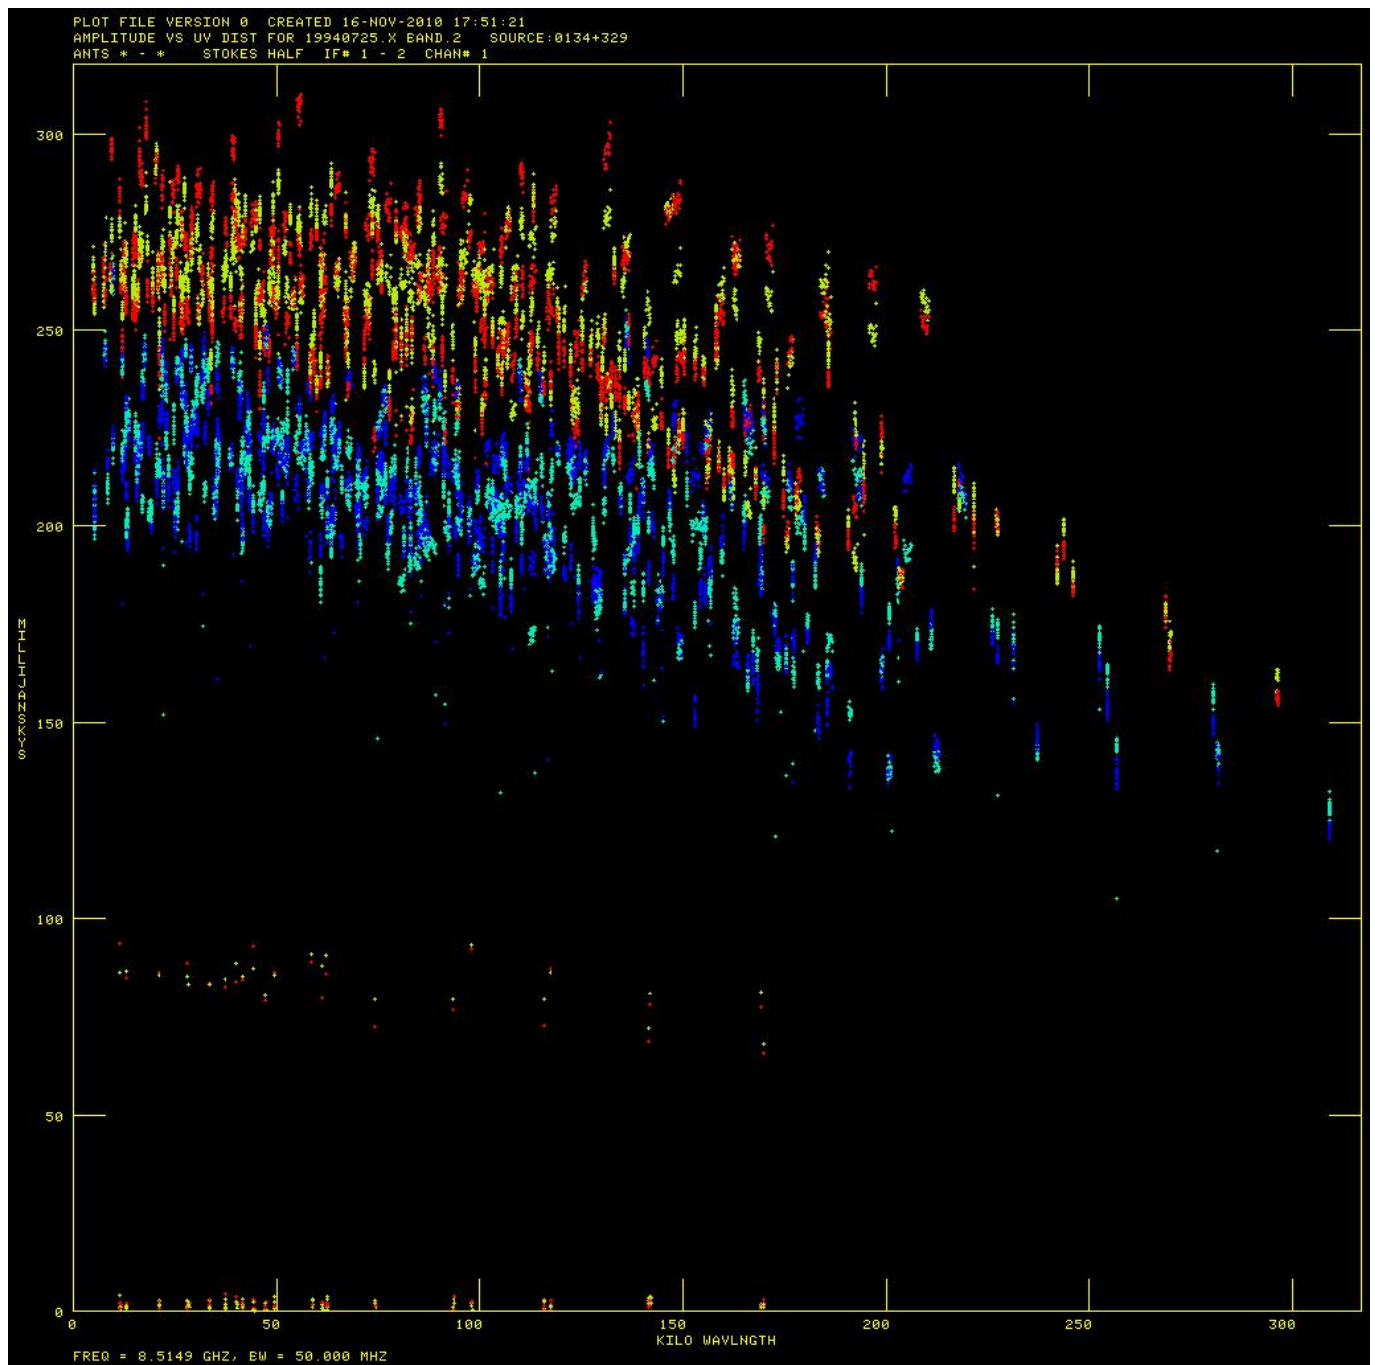

source '0420+417', ' '
tvinit
go

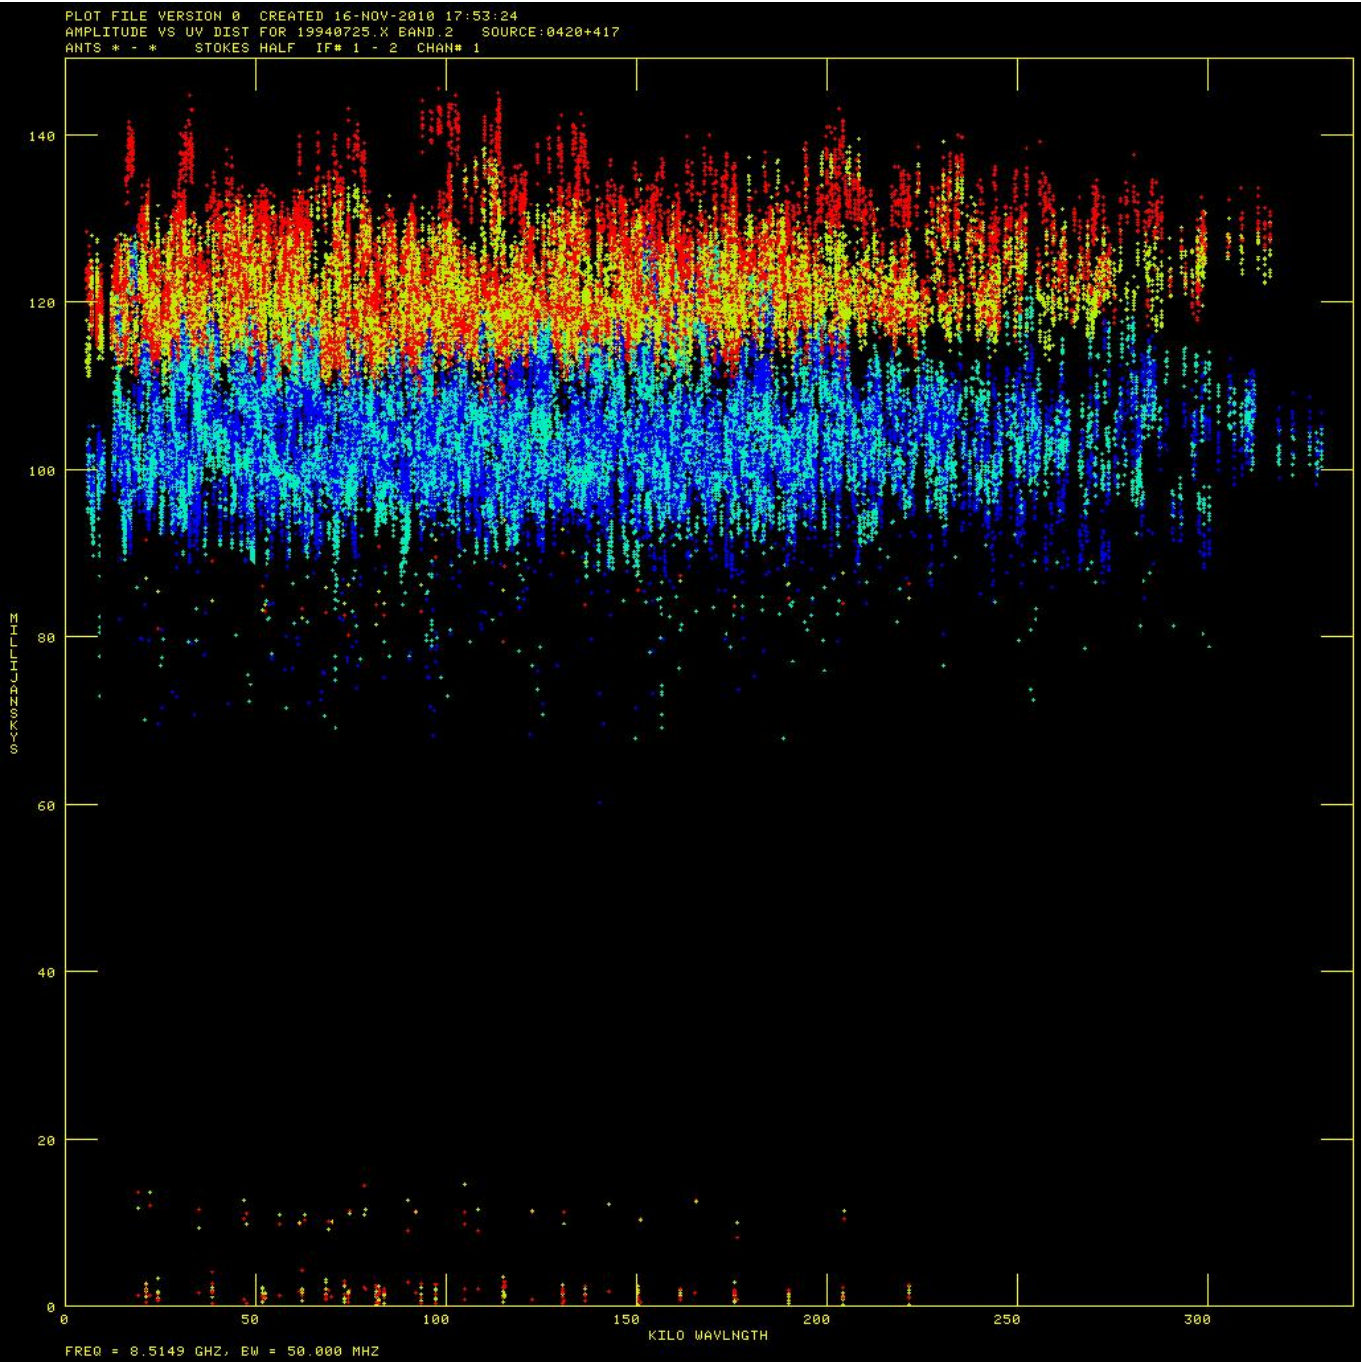

Note that the VLA Calibrator Manual says for this source:

0423+418	J2000	A	04h23m56.009795s	41d50'02.712770"	Aug01
0420+417	B1950	A	04h20m27.936900s	41d43'08.039000"	

BAND	A	B	C	D	FLUX(Jy) UVMIN(kL) UVMAX(kL)
=====					
20cm	L	X	X	P	2.00 visplot
3.7cm	X	P	P	P	1.12 visplot
2cm	U	P	P	P	0.72 visplot
0.7cm	Q	S	S	S	1.00 visplot

So we are not exactly sure at C band (5 GHz, 6 cm) what the source structure is like for the B configuration from the manual. Is it ok to use? For what (u,v) range?


```
source '3C129', ' '  
tvinit  
go
```



```
bparm 6 7  
source '0518+165', ' '  
tvinit  
go
```




```
source '0134+329', ' '  
tvinit  
go
```

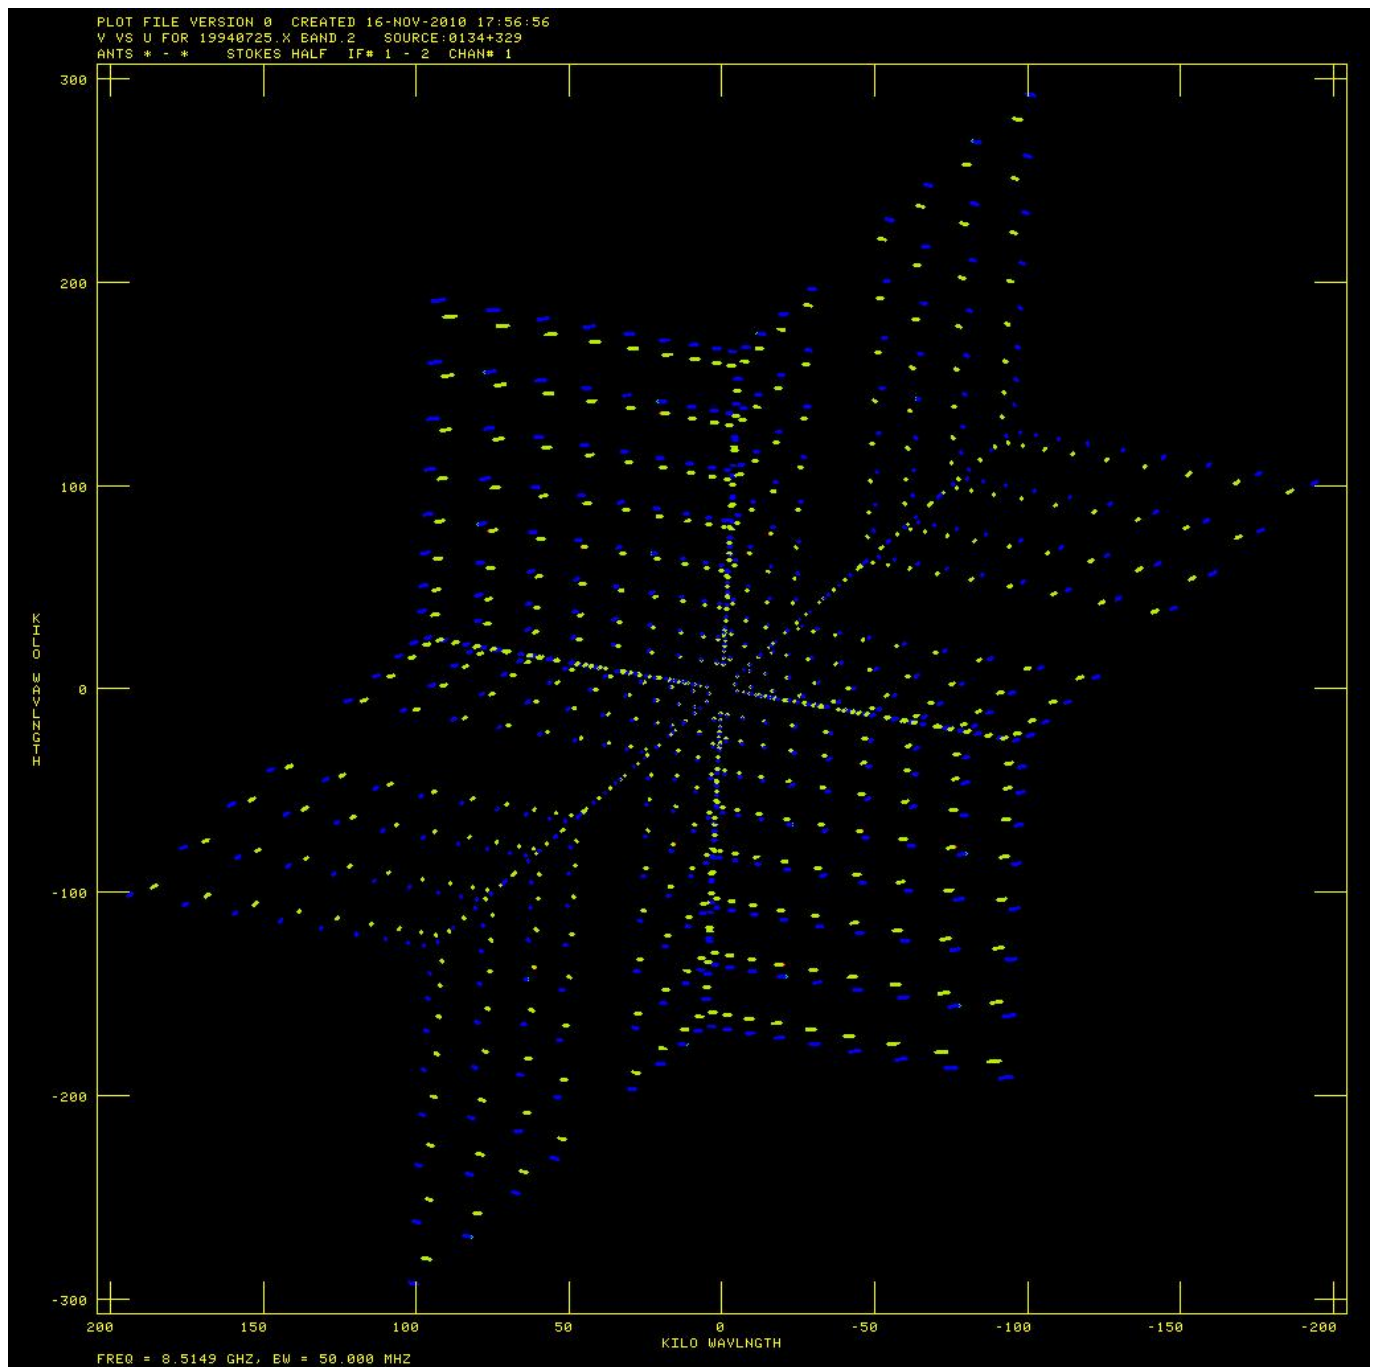

source '0420+417', ' '
tvinit
go



```
source '3C129', ' '  
tvinit  
go
```

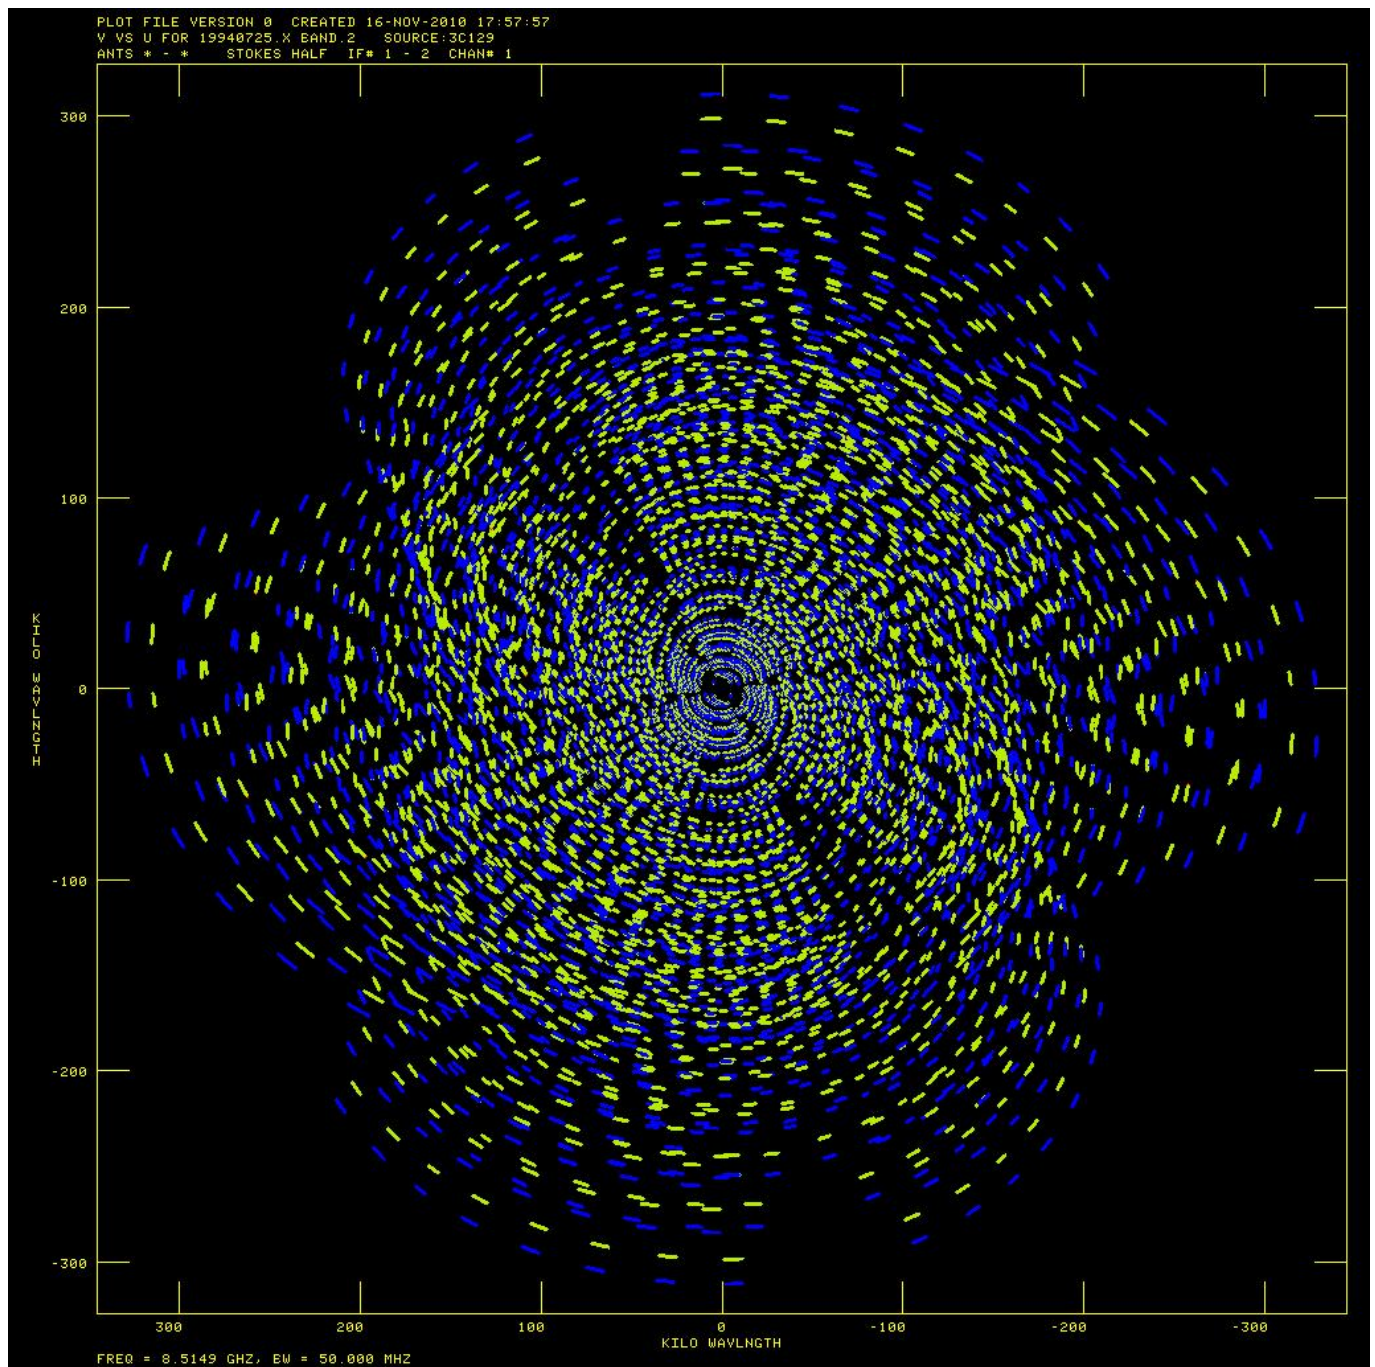

```
bparm 11,15,0
sources '0518+165','0134+329','0420+417','3C129',' '
xinc=10
go
```



bparm 11,16,0
go



```
xinc=1  
bparm 0
```

Raw visibilities

```
task 'listr'  
optype 'list'  
antenna 22,0  
basel 0  
sources '0518+165','0134+329','0420+417', '3C129', ' '  
calcode '*'  
bif 0  
eif 0
```

```
docalib 0
dparm 0
go
```

```
Source=0420+417      : 0002, Stokes=RR , IF= 1, Chans= 1- 1
Flux = 0.0000 Jy, Calcode = B , Freq = 8.514900000 GHz
Amplitudes, 1000 = 1.000000 Jy, averging type = Vector
```

Baselines

```
0122022203220422052206220722082210221122122213221422152216221722182219222022
2122222322242225222622272228
```

```
0/16:47:55 120 117 124 124 129 135 121 122 131 122 123 126
120 125 124 122 124 135 122 119 124 128
0/16:48:05 119 117 115 120 120 129 132 116 121 128 118 120 124
119 123 122 123 121 130 117 117 119 120 126
0/16:48:15 116 113 116 121 121 127 130 115 121 128 119 120 124
116 122 122 120 120 128 116 114 119 121 123
0/16:48:25 118 115 113 119 121 126 133 115 122 129 119 118 124
117 121 124 119 120 128 117 115 120 122 124
0/16:48:35 117 114 116 119 121 127 136 117 123 127 118 120 122
117 122 121 121 120 127 117 115 116 121 126
0/16:48:45 119 112 114 119 122 126 133 117 120 127 120 118 123
117 122 122 120 119 130 118 117 118 119 125
0/16:48:55 117 114 118 120 121 124 133 118 120 130 119 121 124
115 121 122 119 119 128 117 114 119 120 125
0/16:49:05 119 113 115 122 121 127 132 115 121 129 121 121 124
115 121 122 120 120 129 118 117 116 119 125
0/16:49:15 119 116 116 121 120 127 133 117 121 128 117 121 123
117 122 120 119 121 128 120 116 119 120 125
0/16:49:25 118 113 116 123 120 125 132 115 120 127 118 120 126
117 122 121 122 120 131 119 117 120 122 123
```

```
Source=0518+165      : 0002, Stokes=RR , IF= 1, Chans= 1- 1
Flux = 0.0000 Jy, Calcode = C , Freq = 8.514900000 GHz
Amplitudes, 1000 = 1.000000 Jy, averging type = Vector
```

```
0/17:03:25 212 191 205 212 198 177 232 213 183 226 207 210 221
2 165 216 148 195 192 196 204 211 218
0/17:03:35 205 187 199 205 193 171 227 209 179 224 205 206 216
2 161 212 145 188 189 191 201 203 208 212
0/17:03:45 202 186 199 206 192 170 226 206 177 223 202 204 215
2 160 212 143 191 190 190 200 203 207 211
0/17:03:55 205 184 198 205 190 169 228 207 174 224 202 203 216
1 160 210 142 188 187 191 199 202 205 209
0/17:04:05 205 187 197 204 192 171 227 208 176 226 202 206 218
42 160 209 145 188 187 191 198 201 206 213
0/17:04:15 205 185 197 208 190 169 224 207 176 222 202 205 216
197 163 208 145 189 188 190 198 202 205 210
0/17:04:25 204 188 198 206 189 170 224 206 176 226 202 202 216
196 164 210 144 189 190 190 199 204 207 212
Type Q to stop, just hit RETURN to continue
```

vlb054	LISTR(31DEC10)	100	16-NOV-2010	18:12:30	Page	3
Source=0518+165	: 0002, Stokes=RR		IF= 1, Chans=	1-	1	
Baselines						
0122022203220422052206220722082210221122122213221422152216221722182219222022						
2122222322242225222622272228						
0/17:04:35	204 187 197 206 190 170 227 208 175 225	203 208	217			
194 161 210 144 189 190 193 198 206 205 209						
0/17:04:45	206 188 198 208 191 169 227 206 176 226	203 207	214			
197 161 211 145 190 188 191 198 206 207 211						
0/17:04:55	207 188 199 207 190 170 227 207 177 224	204 206	216			
196 161 210 144 191 188 191 199 205 205 209						
0/17:05:05	205 186 200 207 192 171 226 205 175 225	201 207	219			
196 160 210 142 189 189 191 197 209 206 212						
0/17:05:15	206 190 198 208 189 171 227 208 175 224	204 205	217			
197 161 207 141 189 190 191 197 208 205 211						
0/17:05:25	203 189 199 205 189 169 228 207 174 224	202 204	216			
195 160 206 144 188 190 188 199 204 208 213						
0/17:05:35	203 189 200 206 193 170 226 208 176 226	202 205	215			
196 162 207 145 188 187 191 198 206 206 207						
0/17:05:45	202 188 199 207 192 170 225 205 175 223	202 204	216			
196 160 208 143 188 188 190 197 208 206 213						
0/17:05:55	202 189 200 207 190 170 228 206 175 223	203 205	219			
195 158 208 143 190 190 191 201 207 208 210						
0/17:06:05	203 188 197 207 191 173 231 206 174 221	203 203	217			
194 162 208 141 189 188 191 200 205 205 211						
0/17:06:15	204 187 200 206 190 170 227 206 177 222	206 205	217			
196 162 206 145 189 189 191 197 202 207 209						
0/17:06:25	204 190 200 208 192 173 226 207 175 220	204 207	216			
194 162 210 144 188 189 190 199 206 205 212						
Source=0134+329 : 0002, Stokes=RR , IF= 1, Chans= 1- 1						
Flux = 0.0000 Jy, Calcode = C , Freq = 8.514900000 GHz						
Amplitudes, 1000 = 1.000000 Jy, averging type = Vector						
Baselines						
0122022203220422052206220722082210221122122213221422152216221722182219222022						
2122222322242225222622272228						
0/17:18:35	247 246 256 263 275 264 291 261 253 281	270 266	271			
2 236 267 219 251 287 265 261	271 285					
0/17:18:45	242 241 253 262 272 261 287 256 250 280	263 265	268			
1 234 264 215 250 282 262 259 243 269 282						
0/17:18:55	246 241 252 265 273 263 289 257 252 280	265 265	267			
2 238 264 217 248 283 262 257 243 266 282						
0/17:19:05	241 239 249 260 268 264 287 257 249 279	263 263	271			
3 234 262 216 223 282 262 258 244 266 279						
0/17:19:15	240 239 248 257 264 257 288 255 248 277	263 259	269			
84 234 262 214 245 280 262 255 240 264 280						
0/17:19:25	245 235 247 259 266 261 284 257 247 276	259 262	268			
259 236 261 214 246 278 258 256 239 263 277						
0/17:19:35	244 238 249 259 269 263 283 258 248 277	263 261	269			

259 236 260 215 243 279 259 254 238 262 276		
0/17:19:45 240 237 251 260 266 260 284 255 248 274	262 261	269
258 234 262 215 244 279 261 255 241 264 276		
0/17:19:55 245 240 250 258 267 259 287 258 247 276	259 259	267
257 236 261 217 249 281 259 255 237 265 275		
0/17:20:05 240 238 249 259 266 259 286 256 247 277	262 259	267
259 235 263 216 243 283 259 256 240 264 278		
0/17:20:15 242 234 251 257 264 259 284 254 247 274	260 257	272
258 233 263 215 245 278 258 253 241 261 276		
0/17:20:25 245 235 253 259 270 261 286 257 252 277	262 260	271
259 234 263 216 250 280 260 256 240 266 279		
0/17:20:35 240 239 253 261 269 263 289 260 249 276	264 261	272
261 235 262 220 250 280 261 258 240 268 279		
0/17:20:45 245 236 253 260 266 258 286 259 248 276	262 261	270
261 232 261 217 244 283 258 255 244 264 280		
0/17:20:55 245 238 254 257 267 260 284 260 248 277	265 261	272
261 237 263 217 249 282 260 254 242 265 280		
0/17:21:05 242 238 251 259 267 259 281 258 245 275	262 259	268
259 232 260 219 244 280 260 256 242 267 277		
0/17:21:15 242 238 254 260 268 261 288 262 247 274	262 260	269
263 233 260 217 246 285 260 257 238 267 279		
0/17:21:25 246 235 251 257 268 256 286 257 246 276	260 261	268
261 228 262 216 246 281 257 253 242 265 277		
0/17:21:35 247 238 254 260 271 267 287 261 249 276	264 265	269
260 237 262 218 251 282 256 256 242 266 281		

dparm 1,0

go

Source=0420+417 : 0002, Stokes=RR , IF= 1, Chans= 1- 1
 Flux = 0.0000 Jy, Calcode = B , Freq = 8.514900000 GHz
 Phase, 1000 = 1000.00000 degrees, averging type = Vector

Baselines

0122022203220422052206220722082210221122122213221422152216221722182219222022		
2122222322242225222622272228		
0/16:47:55 -85 -95 90-159-108 170 91 167-133	-69 -83	142
-6-110-177 -27 62 -90 -40 -45 136 59		
0/16:48:05 -82 27 -93 92-155-106 171 92 168-131	-70 -84	145
-4-106-172 -25 67 -92 -40 -46-100 131 57		
0/16:48:15 -77 30 -89 96-155-104 175 95 172-128	-69 -83	146
-4-106-171 -23 72 -95 -45 -47-104 131 52		
0/16:48:25 -72 34 -81 101-147 -96 172 100 176-125	-64 -80	151
3 -98-167 -19 73 -99 -46 -50-109 128 47		
0/16:48:35 -74 34 -82 95-147 -97 166 98 176-126	-62 -80	146
2 -94-166 -19 71-100 -47 -45-106 126 45		
0/16:48:45 -73 36 -80 96-149 -95 169 98 175-122	-61 -80	142
2 -94-162 -18 71-101 -45 -48-110 127 48		
0/16:48:55 -73 34 -82 96-148 -96 175 99 176-121	-62 -82	143
3 -95-161 -17 70-101 -46 -47-108 129 49		
0/16:49:05 -72 34 -85 92-146 -94 172 100 176-121	-64 -84	141

```
-1 -98-160 -17 67-101 -44 -47-107 129 46
    0/16:49:15 -72 36 -85 92-148 -92 171 92 177-121 -60 -84 142
1 -97-159 -16 67-102 -45 -43-107 127 46
    0/16:49:25 -74 34 -87 92-148 -91 169 99 174-122 -60 -85 142
1 -96-159 -13 66-102 -45 -46-106 129 46
```

Source=0518+165 : 0002, Stokes=RR , IF= 1, Chans= 1- 1
 Flux = 0.0000 Jy, Calcode = C , Freq = 8.514900000 GHz
 Phase, 1000 = 1000.00000 degrees, averging type = Vector

```
    0/17:03:25 -99 26 -80 109-155-110 174 103 -82-130 -65 -79 135
70 -93 159 -37 24 -97 -37 -49 118 42
    0/17:03:35 -100 28 -80 110-151-110 173 103 -81-131 -65 -79 137
85 -91 160 -36 22 -96 -38 -49-104 119 42
    0/17:03:45 -103 24 -85 104-156-112 169 100 -86-136 -70 -81 133
19 -92 159 -40 22 -93 -32 -43-101 126 47
    0/17:03:55 -102 22 -88 102-157-113 169 100 -87-135 -72 -79 136
30 -90 158 -39 23 -90 -34 -44 -99 123 45
    0/17:04:05 -105 23 -92 99-160-116 167 98 -88-142 -76 -82 133
23 -91 154 -40 16 -88 -31 -43 -94 129 44
    0/17:04:15 -104 26 -88 101-156-114 169 103 -84-140 -73 -80 130
20 -89 156 -38 23 -89 -32 -48 -98 129 40
    0/17:04:25 -105 26 -89 99-157-113 169 103 -84-141 -76 -83 131
17 -90 157 -32 23 -89 -31 -45 -96 127 42
```

Type Q to stop, just hit RETURN to continue

vlb054 LISTR(31DEC10) 100 16-NOV-2010 18:13:14 Page 3

Source=0518+165 : 0002, Stokes=RR , IF= 1, Chans= 1- 1

Baselines

0122022203220422052206220722082210221122122213221422152216221722182219222022
 2122222322242225222622272228

```
    0/17:04:35 -100 32 -80 108-147-103 175 109 -76-135 -69 -77 140
25 -81 165 -22 29 -98 -42 -49-100 120 33
    0/17:04:45 -101 31 -80 107-147-103 167 108 -76-142 -70 -78 142
23 -81 165 -22 28-100 -41 -45 -99 124 33
    0/17:04:55 -100 33 -80 109-145-102 173 109 -76-141 -68 -80 142
23 -82 164 -21 27-101 -40 -45 -98 124 31
    0/17:05:05 -102 30 -81 111-147-100 172 110 -74-141 -69 -81 141
22 -83 162 -21 28-103 -40 -45 -98 125 32
    0/17:05:15 -104 34 -81 112-142 -99 170 109 -71-142 -68 -80 145
23 -85 165 -16 30-103 -41 -45-100 124 26
    0/17:05:25 -105 32 -82 109-141 -96 176 109 -70-143 -68 -84 148
22 -86 168 -13 33-100 -40 -44-100 125 25
    0/17:05:35 -108 32 -83 111-141 -94 174 110 -71-142 -69 -78 151
20 -90 168 -11 34 -98 -41 -45 -98 125 25
    0/17:05:45 -111 33 -83 110-140 -94 172 108 -72-140 -69 -79 149
18 -94 166 -11 34 -97 -40 -44 -96 127 27
    0/17:05:55 -112 35 -81 110-140 -91 174 108 -68-142 -64 -76 151
18 -93 166 -9 39 -97 -40 -45 -95 127 24
    0/17:06:05 -111 34 -83 110-141 -94 174 108 -70-143 -66 -78 150
```

```

16 -95 163 -10 41 -96 -40 -43 -96 128 24
    0/17:06:15 -113 32 -85 108-143 -93 171 108 -72-145 -69 -79 151
15 -97 161 -12 41 -97 -41 -42 -92 131 27
    0/17:06:25 -112 32 -85 108-144 -95 171 109 -73-147 -69 -79 148
14 -98 161 -15 42 -97 -38 -42 -91 132 25

```

Source=0134+329 : 0002, Stokes=RR , IF= 1, Chans= 1- 1
 Flux = 0.0000 Jy, Calcode = C , Freq = 8.514900000 GHz
 Phase, 1000 = 1000.00000 degrees, averging type = Vector

Baselines

```

0122022203220422052206220722082210221122122213221422152216221722182219222022
2122222322242225222622272228
    0/17:18:35 -138 62 -85 125-129 -67 172 106 28-170 -47 -92 -172
-15 -54 159 87 132-105 -17 -13 136 30
    0/17:18:45 -139 55 -87 121-130 -71 169 105 25-172 -49 -94
-172-162 -57 155 86 129-100 -15 -9 -42 137 30
    0/17:18:55 -139 54 -84 124-132 -70 163 104 22-174 -49 -92 -171
104 -56 149 82 127 -97 -12 -11 -45 135 28
    0/17:19:05 -144 48 -86 118-130 -74 153 100 13 175 -56 -99 -177
112 -64 139 79 93 -87 -1 -3 -39 138 31
    0/17:19:15 -147 46 -87 117-135 -81 152 100 7 172 -62-105 177
-19 -69 133 67 88 -80 2 6 -32 142 35
    0/17:19:25 -147 42 -91 114-131 -87 149 97 -2 164 -68-108 177
-21 -76 126 62 79 -74 7 10 -28 145 39
    0/17:19:35 -144 41 -86 119-130 -83 153 99 -6 165 -69-106 177
-16 -77 134 65 110 -75 2 9 -29 140 35
    0/17:19:45 -147 38 -89 115-134 -88 147 93 -9 163 -79-107 170
-21 -80 129 58 101 -67 0 13 -25 142 37
    0/17:19:55 -150 37 -90 115-139 -93 145 90 -15 165 -82-104 169
-21 -81 132 51 97 -64 -6 16 -24 141 39
    0/17:20:05 -150 40 -83 116-143 -91 144 89 -16 167 -82 -99 168
-17 -81 136 49 94 -67 -4 16 -27 138 40
    0/17:20:15 -149 41 -76 120-135 -89 148 94 -13 173 -83 -97 170
-16 -79 139 46 107 -70 -7 11 -30 132 40
    0/17:20:25 -146 43 -73 123-139 -87 150 94 -13 177 -85 -96 173
-17 -77 145 46 105 -72 -4 6 -34 131 40
    0/17:20:35 -147 46 -73 122-133 -91 151 94 -14 178 -85 -96 171
-21 -81 144 45 106 -68 -3 10 -36 128 44
    0/17:20:45 -146 45 -71 120-137 -88 154 97 -15-178 -84 -87 172
-18 -80 150 46 93 -67 -8 11 -40 123 49
    0/17:20:55 -143 49 -66 121-131 -81 160 103 -6-169 -78 -81 177
-13 -78 151 54 111 -72 -10 5 -47 117 44
    0/17:21:05 -149 40 -70 114-137 -82 159 99 -9-165 -86 -83 173
-15 -82 148 53 75 -69 -7 5 -45 120 47
    0/17:21:15 -153 38 -71 108-142 -82 160 98 -11-164 -92 -85 162
-16 -83 147 51 93 -70 -6 11 -40 122 50
    0/17:21:25 -156 37 -74 105-144 -84 157 92 -19-170 -101 -87 154
-14 -89 140 48 99 -66 0 13 -36 124 51
    0/17:21:35 -152 43 -76 104-142 -78 161 94 -13-164 -103 -84 155
-13 -85 145 52 102 -72 0 13 -39 121 47

```

dparm 0

Flag some bad data. Just run the commands.

```
task 'quack'
reason 'slow start'
sources ' '
calcode ' '
stokes ' '
timer 0
antenna 17 0
flagver 1
opcode 'beg'
basel 0
bif 1
eif 1
aparm 0
aparm(2) 72.5/60
go
```

Start the calibration

Set the flux values of the known calibrators

```
task 'setjy'
default
getn 3
source '0518+165', ' '
bif 0
eif 0
optype 'calc'
aparm(2) 3
go
```

```
vlb054> SETJY1: Task SETJY (release of 31DEC10) begins
vlb054> SETJY1: **WARNING: OPCODE=CALC AND FREQID = -1
vlb054> SETJY1: FREQID WILL BE RESET TO 1, CHECK YOUR RESULTS CAREFULLY
vlb054> SETJY1: A source model for this calibrator is available
vlb054> SETJY1: Consult the help file for CALRD for assistance
vlb054> SETJY1: / Flux calculated using known spectrum
vlb054> SETJY1: BIF = 1 EIF = 2 /Range of IFs
vlb054> SETJY1: '0518+165 ' IF = 1 FLUX = 2.4983 (Jy calcd)
vlb054> SETJY1: '0518+165 ' IF = 2 FLUX = 2.4166 (Jy calcd)
vlb054> SETJY1: / Using (1995.2) VLA or Reynolds (1934-638) coefficients
vlb054> SETJY1: Appears to have ended successfully
```

```
vlb054> SETJY1: vlb054          31DEC10 TST: Cpu=          0.0  Real=          0
```

```
bif 1
eif 1
optype ' '
zerosp 2.4983, 0.3092, -0.0628, 0.0
go
bif 2
eif 2
zerosp 2.4166, 0.2990, -0.0607, 0.0
go

bif 0
eif 0
zerosp 0
optype 'calc'
source = '0134+329',' '
go
```

```
vlb054> SETJY1: Task SETJY (release of 31DEC10) begins
vlb054> SETJY1: **WARNING: OPCODE=CALC AND FREQID = -1
vlb054> SETJY1: FREQID WILL BE RESET TO 1, CHECK YOUR RESULTS CAREFULLY
vlb054> SETJY1: A source model for this calibrator is available
vlb054> SETJY1: Consult the help file for CALRD for assistance
vlb054> SETJY1: / Flux calculated using known spectrum
vlb054> SETJY1: BIF = 1 EIF = 2 /Range of IFs
vlb054> SETJY1: '0134+329' IF = 1 FLUX = 3.2045 (Jy calcd)
vlb054> SETJY1: '0134+329' IF = 2 FLUX = 3.0714 (Jy calcd)
vlb054> SETJY1: / Using (1995.2) VLA or Reynolds (1934-638) coefficients
vlb054> SETJY1: Appears to have ended successfully
vlb054> SETJY1: vlb054          31DEC10 TST: Cpu=          0.0  Real=          0
```

```
bif 1
eif 1
optype ' '
zerosp 3.2045, 0.0772, -0.1722, 0.0
go
bif 2
eif 2
zerosp 3.0714, 0.0740, -0.1650, 0.0
go

bif 0
eif 0
```

Get images (and thus clean components) for the calibrators

```
task 'calrd'
object '3c138'
band 'c'
```

go

object '3c48'

band 'c'

go

pcat

```
AIPS 1: Catalog on disk 1
AIPS 1:  Cat Usid Mapname      Class  Seq  Pt      Last access      Stat
AIPS 1:   1  100 19940725      .C BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   2  100 19940725      .X BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   3  100 19940725      .X BAND.    2  UV  16-NOV-2010 13:15:34
AIPS 1:   4  100 19940725      .C BAND.    2  UV  16-NOV-2010 15:02:52
AIPS 1:   5  100 19940725      .U BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   6  100 19940725      .C BAND.    3  UV  16-NOV-2010 13:15:45
AIPS 1:   7  100 19940725      .C BAND.    4  UV  16-NOV-2010 13:15:44
AIPS 1:   8  100 19940725      .X BAND.    3  UV  16-NOV-2010 13:15:44
AIPS 1:   9  100 19940725      .X BAND.    4  UV  16-NOV-2010 13:15:45
AIPS 1:  10  100 3C138_C      .MODEL .    1  MA  16-NOV-2010 15:03:51
AIPS 1:  11  100 3C48_C      .MODEL .    1  MA  16-NOV-2010 15:03:55
```

Convert the (u,v) data to the epoch of the calibration images

Note: it is possible to change the epoch of the calibration image headers to B1950, but there would remain a small error in the rotation of the coordinate system. The proper fix is to convert the (u,v) coordinates or to rotate the images.

task 'uvfix'

clron

outdisk 1

shift 0

uvfixprm 0

go

Now fix the index table.

pcat

task 'indxr'

getn 12

cparm 0

cparm(3)= -1

bparm 0

go

cparm 0

Do the actual calibration. Start with 3C138

```
task 'calib'  
default  
getn 12  
calsour '0518+165', ' '  
uvrange 0  
antenna 0  
refant 22  
minamper 10  
minphser 10  
weightit 1  
get2n 10  
ncomp 0  
solmode 'A&P'  
aparm(6) 2  
solint 2  
solsub 2  
cparm(3) 10  
cparm(4) 10  
go  
clrmsg
```

Calibrate 3C48

```
calsour '0134+329', ' '  
get2n 11  
go  
clrmsg
```


Calibrate the phase calibrator

```
clr2n  
calsour '0420+417', ' '  
solint 0  
uvrange 20 0  
go  
clrmsg
```

Check the results

```
task 'snplt'  
antenna 0  
stokes ' '  
inext 'sn'  
inver 1
```

```
sources ' '  
timer 0  
optype 'amp'  
opcode 'alsi'  
do3col 1  
dotv 1  
xinc 1  
nplots 9  
tvinit  
go  
optype 'phas'  
go  
inver 2  
optype 'amp'  
go  
optype 'phas'  
go  
inver 3  
optype 'amp'  
go  
optype 'phas'  
go
```

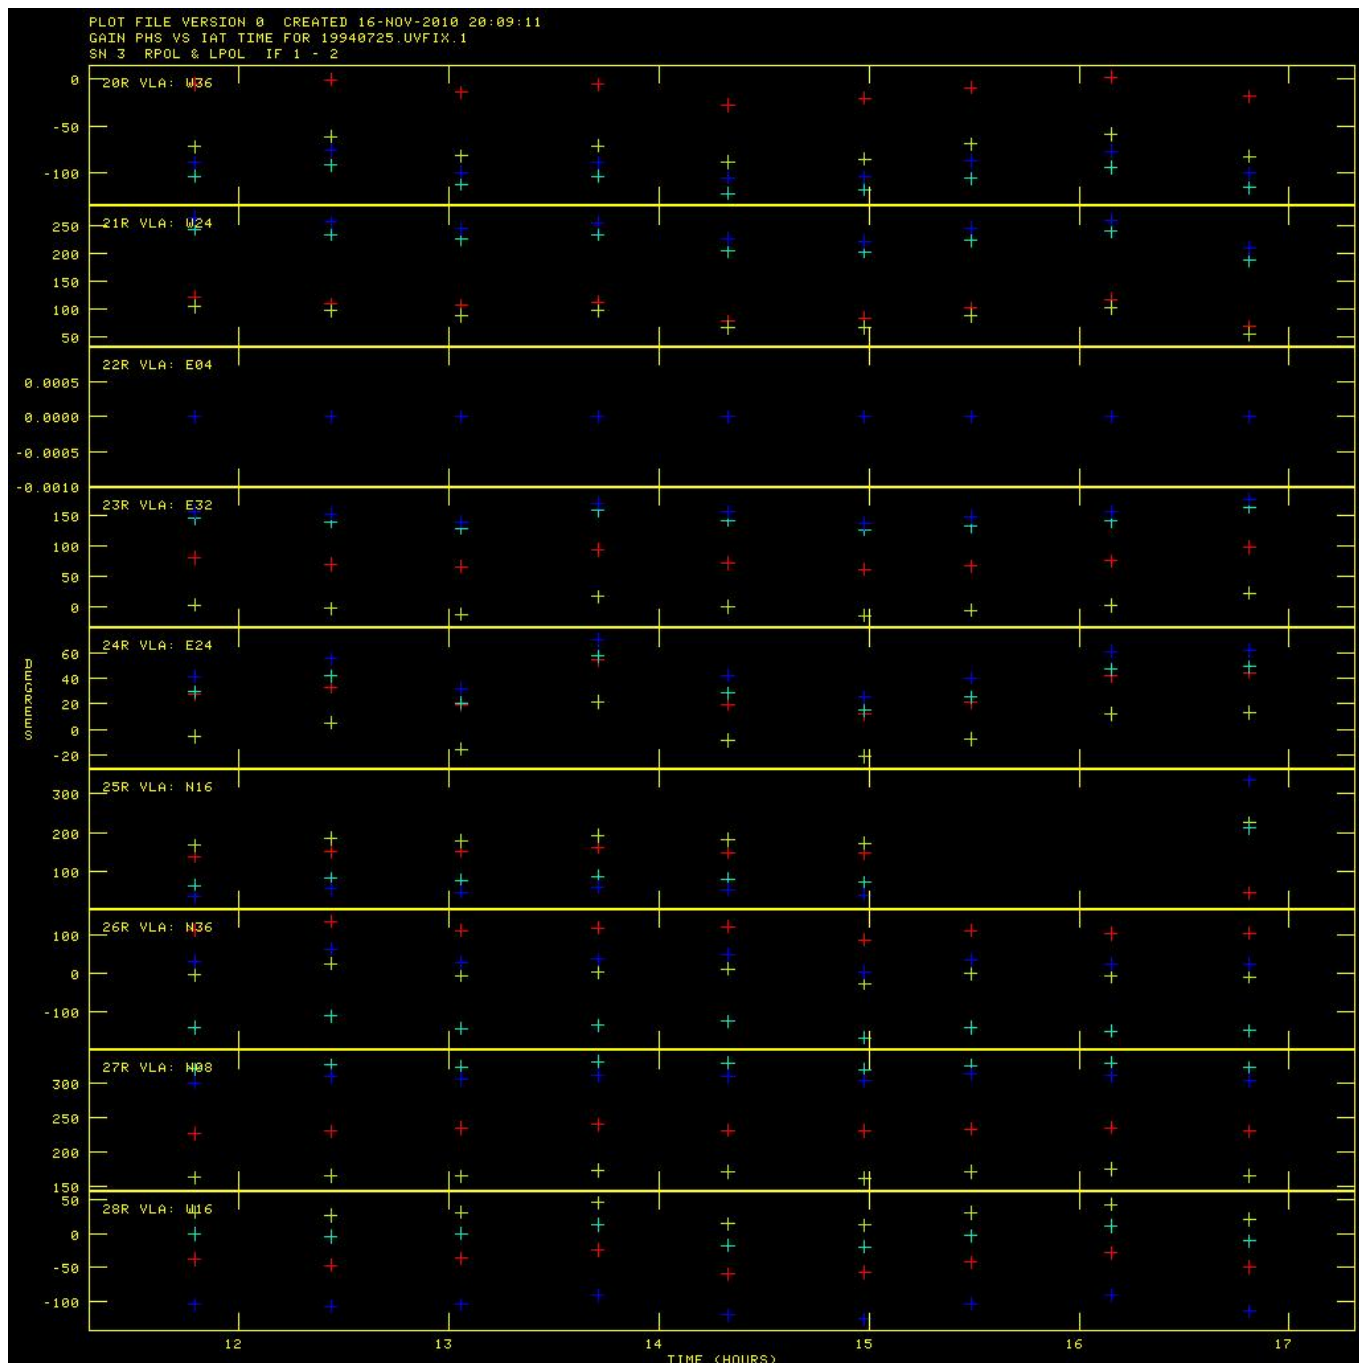

Apply the calibration to the phase calibrator

```
task 'getjy'
sources '0420+417', ' '
calsour '0518+165','0134+329',' '
calcode ' '
bif 0
eif 0
antenna 0
timer 0
snver 0
go
```

vlb054> GETJY1: Task GETJY (release of 31DEC10) begins

```

vlb054> GETJY1: Calibrator robust averaging used      800 of      800 gain
samples
vlb054> GETJY1:      Source:Qual      CALCODE IF  Flux (Jy)
vlb054> GETJY1: 0420+417      : 2  B      1      1.41441 +/-      0.00432
0.00433
vlb054> GETJY1:      2      1.40546 +/-      0.00442
0.00442
vlb054> GETJY1:      Source:Qual      CALCODE      used      total      bad used      tot
bad
vlb054> GETJY1: 0420+417      : 2 B      904      904      0 100 100
0
vlb054> GETJY1: Appears to have ended successfully
vlb054> GETJY1: vlb054 31DEC10 TST: Cpu=      0.0 Real=      0 IO=
1

```

Redo the phase calibrator calibration

Now that the flux density of the phase calibrator has been found, redo its calibration (just to make sure there are no remnants of some subtle assumptions about its flux density left in AIPS).

```

inext 'sn'
inver 3
extdest
inver 0
tget calib
go
clrmsg

```

Apply the calibration to all sources of interest.

```


task 'clcal'
sources '0518+165','0134+329','0420+417', '3C129', ' '
calsour '0518+165','0134+329','0420+417', ' '
opcode 'cali'
gainver 1
gainuse 2
refant 22
interp '2pt'
doblack 1
go

```

Have a look at the calibration

Plots

```
task 'uvplt'  
source '0518+165', ' '  
calcode ' '  
stokes 'half'  
timer 0  
uvrange 0  
bif 0  
eif 0  
docalib 1  
gainuse 2  
bparm 0 1  
aparm 0  
refant 22  
do3col 1  
dotv 1  
tvinit  
go
```

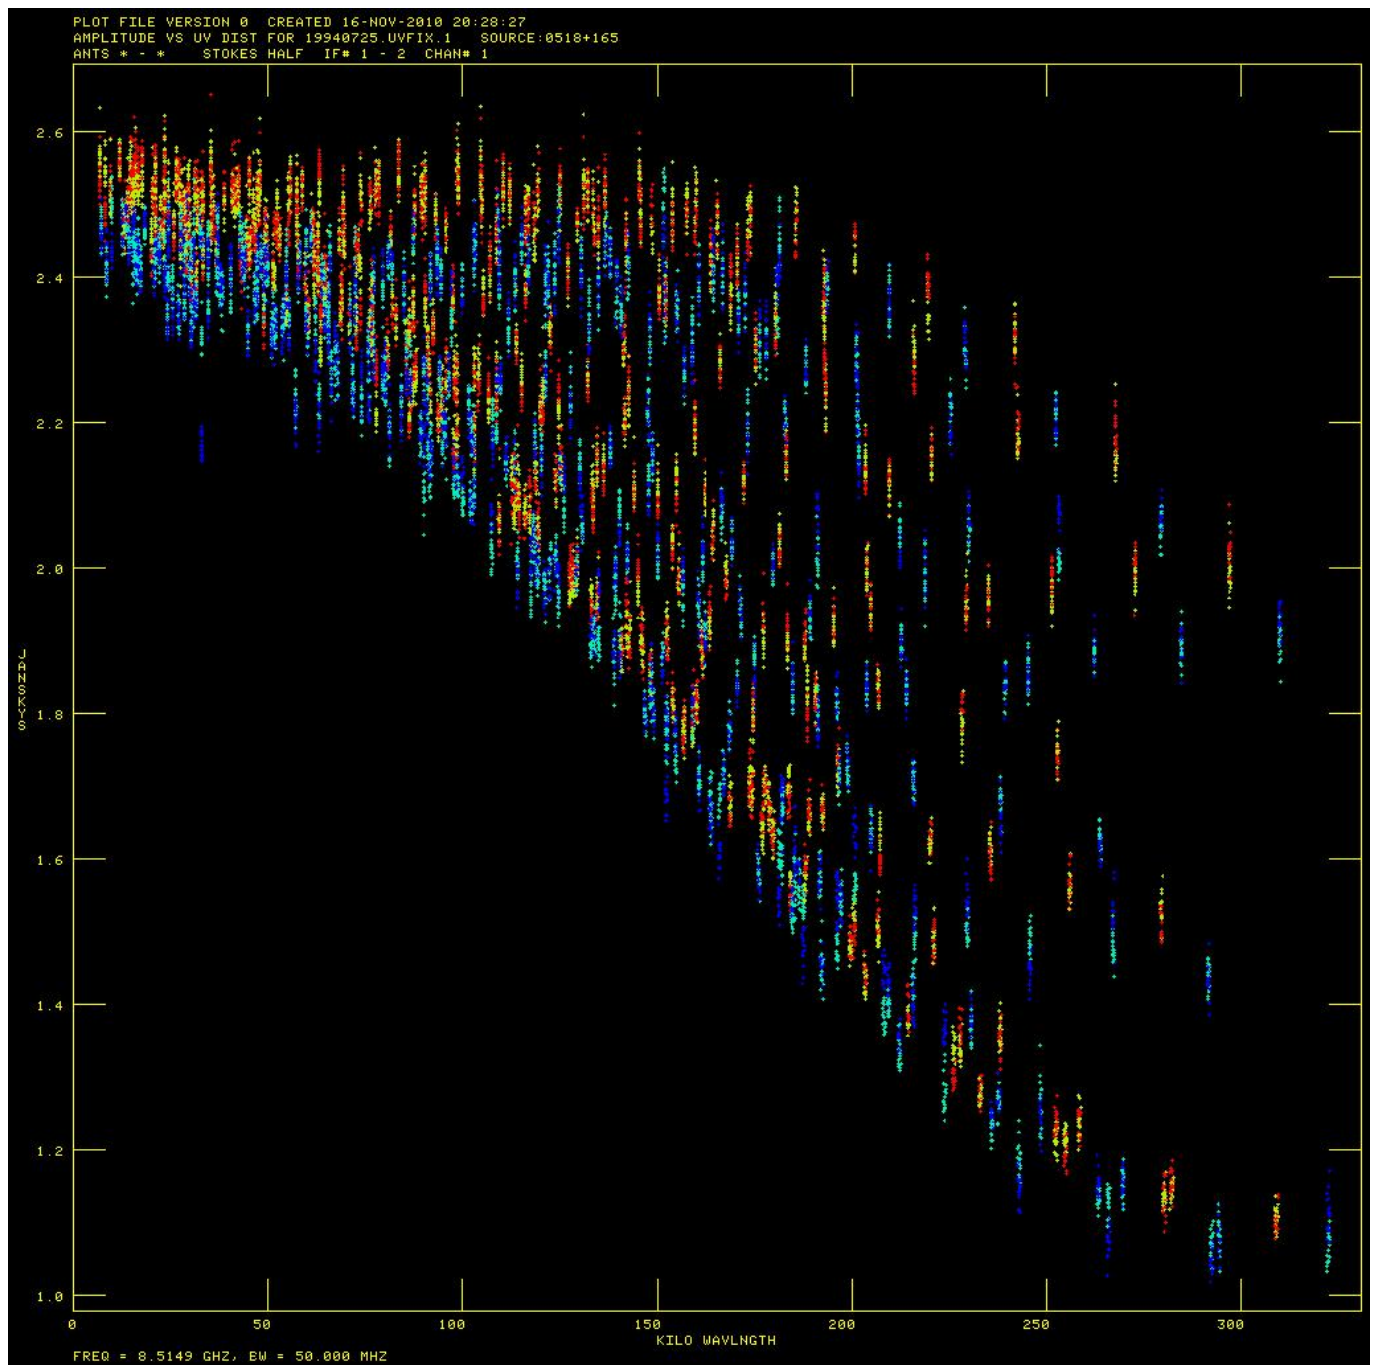

Why are the different colored points for the different subbands and polarizations not overlapping?

source '0134+329', ' '
tvinit
go



Again the different colors do not overlap. Why not?

```
source '0420+417', ' '
tvinit
go
```

Last update: 2010-11-16 19:11 public:meetings:glowbi2008:tutorial_wednesday https://www.astron.nl/lofarwiki/doku.php?id=public:meetings:glowbi2008:tutorial_wednesday&rev=1289934707



But here they do overlap. Why? How has this changed from before?

```
source '3C129', ' '
tvinit
go
```



Start the polarization calibration

Check the parallactic angle change

```
task 'litr'  
sources '0518+165','0134+329','0420+417', ' '  
inext 'cl'  
inver 2  
optype 'gain'  
dparm 9,0  
stokes ' '  
go
```

Or just look at the PA plot above in the initial UVPLT section.

Make a backup of calibration values, in case we mess up

```
task 'tasav'  
clro  
outdi 1  
go
```

Now do the polarization calibration using the phase calibrator

```
task 'pcal'  
calsour '0420+417', ' '  
timer 0  
antenna 0  
uvrange 20,0  
bif 0  
eif 0  
docalib 1  
gainuse 2  
clr2n  
pmodel 0  
solint 3  
soltype 'appr'  
prtlev 1  
refant 22  
bparm 0  
cparm 0  
go  
clrmsg
```

```
vlb054> PCAL 1: Calibration source    1    0420+417  
vlb054> PCAL 1:   Q+iU=(  -0.01034,   0.03759) +/- (  0.000106,   0.000106)  
Jy  
vlb054> PCAL 1:   Pol. inten. =    0.03899 +/-   0.000150 Jy  
vlb054> PCAL 1:   Pol. angle  =   52.69 +/-   0.078 deg  
vlb054> PCAL 1: 0420+417           I,Q,U,V=    1.4671 -0.01034   0.03759  
0.00000 Jy  
vlb054> PCAL 1: Calibration source    1    0420+417  
vlb054> PCAL 1:   Q+iU=(  -0.03422,   0.00814) +/- (  0.000113,   0.000113)  
Jy  
vlb054> PCAL 1:   Pol. inten. =    0.03518 +/-   0.000160 Jy  
vlb054> PCAL 1:   Pol. angle  =   83.31 +/-   0.092 deg  
vlb054> PCAL 1: 0420+417           I,Q,U,V=    1.4715 -0.03422   0.00814  
0.00000 Jy
```

Using the calibration, check the difference between polarizations on a polarized calibrator

```
task 'rldif'
source '0518+165', ' '
timer 0
antenna 0
uvrange 0,45
docalib 1
gainuse 2
dopol true
go
```

```
Ampscalar average of matrix = -30.20( 0.091) sigma = 1.307= 1.160
Ampscalar average of matrix = 33.92( 0.103) sigma = 1.487= 1.389
```

outputs

```
AIPS 1: RLDIF: Task to return/apply Right - Left phase difference
AIPS 1: Adverbs      Values                                Comments
AIPS 1: -----
AIPS 1: CLCORPRM    -30.2029      33.9241    R-L phase difference returned
AIPS 1:              *rest 0
```

Another save, just in case

```
task 'tasav'
clro
outdi 1
go
```

What is the angle supposed to be for this calibrator?

Polarization data for C band from <http://www.vla.nrao.edu/astro/calib/polar/1999/>

Correct number is -21.71

Correct the measured values

```
for i=1 to 2;clcorp(i) = -21.71 - clcorp(i);end
```

Apply them

```
task 'clcor'
source ' '

```

```
antenna 0
timer 0
bif 0
eif 0
gainver 2
gainuse 0
opcode 'polr'
stokes 'l'
go
```

Check that the angles match what we expect

```
task 'rldif'
source '0518+165', ' '
timer 0
antenna 0
uvrange 0,45
docalib 1
gainuse 3
dopol true
go
```

Look at what AIPS gave back

outputs

```
AIPS 1: RLDIF: Task to return Right - Left phase difference
AIPS 1: Adverbs      Values      Comments
AIPS 1: -----
AIPS 1: CLCORPRM    -21.71    -21.71    R-L phase difference returned
AIPS 1:              *rest 0
```

#####

Now start with the smaller array data. Load it in

(Actually, in the 2010 Nov 16 version of these instructions, it is already loaded in slot 7. You can skip this step if you want.)

FILLM

```
task 'fillm'
default
nfiles 2
```

```

prtleve 0
datain 'PWD:AT166_
doconcat true
clron
doweight 10
ncount 1
cparm(4)=28
cparm(8)=10./60
go

```

Check where it went

```
pcat
```

```

AIPS 1: Catalog on disk 1
AIPS 1:  Cat Usid Mapname      Class  Seq  Pt      Last access      Stat
AIPS 1:   1  100 19940725      .C BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   2  100 19940725      .X BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   3  100 19940725      .X BAND.    2  UV  16-NOV-2010 13:15:34
AIPS 1:   4  100 19940725      .C BAND.    2  UV  16-NOV-2010 15:08:27
AIPS 1:   5  100 19940725      .U BAND.    1  UV  16-NOV-2010 13:15:34
AIPS 1:   6  100 19940725      .C BAND.    3  UV  16-NOV-2010 13:15:45
AIPS 1:   7  100 19940725      .C BAND.    4  UV  16-NOV-2010 16:08:46
AIPS 1:   8  100 19940725      .X BAND.    3  UV  16-NOV-2010 13:15:44
AIPS 1:   9  100 19940725      .X BAND.    4  UV  16-NOV-2010 13:15:45
AIPS 1:  10  100 3C138_C      .MODEL .    1  MA  16-NOV-2010 15:17:52
AIPS 1:  11  100 3C48_C      .MODEL .    1  MA  16-NOV-2010 15:24:38
AIPS 1:  12  100 19940725      .UVFIX .    1  UV  16-NOV-2010 16:03:44
AIPS 1:  13  100 19940725      .TASAV .    1  UV  16-NOV-2010 15:49:48

```

Makre sure we have the right one

```

getn 6
imhe

```

Get the scan information

```

task 'listr'
default
getn 7
optype 'scan'
doweight 1
go

```

```

v1b054    LISTR(31DEC10)    100    16-NOV-2010 16:10:46    Page    1
File = 19940725      .C BAND.    4 Vol = 1  Userid = 100
Freq = 7.814900000 GHz  Ncor = 4   No. vis = 313007

```

Scan summary listing

Scan	Source	Qual	Calcode	Sub	Timerange	FrqID
START VIS	END VIS					
1	0134+329	: 0001	C		1101/03:50:05 - 101/03:50:05	1
1	351					
2	0134+329	: 0001	C		1101/03:50:15 - 101/04:01:35	1
352	24492					
3	0056-001	: 0001	C		1101/04:09:15 - 101/04:11:15	1
24493	24525					
4	0053-016	: 0001			1101/04:14:05 - 101/04:22:05	1
24526	41158					
5	0053-015	: 0001			1101/04:30:55 - 101/04:38:55	1
41159	57845					
6	0056-001	: 0001	C		1101/04:47:35 - 101/04:49:36	1
57846	61842					
7	0053-016	: 0001			1101/04:52:25 - 101/05:00:25	1
61843	78492					
8	0053-015	: 0001			1101/05:09:15 - 101/05:17:15	1
78493	95142					
9	0056-001	: 0001	C		1101/05:25:55 - 101/05:27:55	1
95143	99139					
10	0053-016	: 0001			1101/05:30:45 - 101/05:38:45	1
99140	115772					
11	0053-015	: 0001			1101/05:47:35 - 101/05:55:35	1
115773	132440					
12	0056-001	: 0001	C		1101/06:04:05 - 101/06:06:14	1
132441	136762					
13	0053-016	: 0001			1101/06:09:05 - 101/06:17:05	1
136763	153395					
14	0053-015	: 0001			1101/06:25:55 - 101/06:33:55	1
153396	170063					
15	0056-001	: 0001	C		1101/06:42:35 - 101/06:44:35	1
170064	174077					
16	0053-016	: 0001			1101/06:47:25 - 101/06:55:25	1
174078	190710					
17	0053-015	: 0001			1101/07:04:15 - 101/07:12:15	1
190711	207378					
18	0056-001	: 0001	C		1101/07:20:55 - 101/07:22:55	1
207379	211375					
19	0420+417	: 0001	B		1101/07:29:35 - 101/07:31:26	1
211376	214487					
20	0518+165	: 0001	C		1101/07:36:55 - 101/07:38:55	1
214488	218426					
21	3C129	: 0001			1101/07:47:35 - 101/08:02:35	1
218427	249671					
22	0420+417	: 0001	B		1101/08:23:55 - 101/08:25:25	1
249672	252804					
23	3C129	: 0001			1101/08:29:46 - 101/08:44:45	1
252805	283300					

```

 24 0420+417      : 0001  B      1101/08:45:45 - 101/08:47:15      1
283301      286784
 25 0420+417      : 0001  B      1101/09:13:26 - 101/09:14:55      1
286785      289484
 26 3C129         : 0001          1101/09:19:45 - 101/09:29:45      1
289485      309848
 27 0420+417      : 0001  B      1101/09:45:55 - 101/09:47:25      1
309849      313007

```

Type Q to stop, just hit RETURN to continue

```

v1b054    LISTR(31DEC10)    100    16-NOV-2010  16:11:06    Page    2
File = 19940725    .C BAND.    4 Vol = 1  Userid = 100

```

Source summary

Velocity type = ' ' Definition = ' '

ID	Source	Qual	Calcode	RA(1950.0)	Dec(1950.0)	IFlux
QFlux	UFlux	VFlux	No. vis			
1	0134+329	: 0001	C	01:34:49.8320	32:54:20.520	0.000
0.000	0.000	0.000	24492			
2	0056-001	: 0001	C	00:56:31.7550	-00:09:18.750	0.000
0.000	0.000	0.000	20360			
3	0053-016	: 0001		00:53:28.0000	-01:36:45.000	0.000
0.000	0.000	0.000	83182			
4	0053-015	: 0001		00:53:52.2350	-01:31:57.790	0.000
0.000	0.000	0.000	83341			
5	0420+417	: 0001	B	04:20:27.9370	41:43:08.045	0.000
0.000	0.000	0.000	15588			
6	0518+165	: 0001	C	05:18:16.5320	16:35:26.900	0.000
0.000	0.000	0.000	3939			
7	3C129	: 0001		04:45:31.6950	44:55:19.950	0.000
0.000	0.000	0.000	82105			

ID	Source	Freq(GHz)	Velocity(Km/s)	Rest freq (GHz)
1	All Sources	7.8149	0.0000	0.0000

Frequency Table summary

FQID	IF#	Freq(GHz)	BW(kHz)	Ch.Sep(kHz)	Sideband
1	1	7.81490000	50000.0039	50000.0039	1

Get antenna positions

go prtan

Location Of VLA Antennas

N18 (26)
 N16 (1)
 N14 (9)
 N12 (11)

```

                                N10 (15)
                                N8  (27)
                                N6  (25)
                                N4  (14)
                                N2  (13)
                                ( 3) W2    E2  ( 4)
                                (12) W4    E4  (22)
                                (21) W6    E6  (16)
                                ( 8) W8    E8  (17)
                                ( 2) W10   E10 (24)
                                (10) W12   E12 ( 5)
                                (18) W14   E14 (23)
                                (28) W16   E16 ( 7)
                                (20) W18   E18 ( 6)
                                VLA:_OUT (19)
                                VPT:_OUT (29)

```

AIPS 1: Resumes

Check out some properties of the raw data

Plots

```

task 'uvplt'
source '0518+165', ' '
calcode ' '
stokes 'half'
timer 0
uvrange 0
bif 0
eif 0
docalib 0
gainuse 1
bparm 0 1
aparm 0
refant 4
antennas 0
do3col 1
dotv 1
tvinit
go
source '0134+329', ' '
tvinit
go
source '0420+417', ' '
tvinit
go
source '3C129', ' '

```

```
tvinit
go
bparm 6 7
source '0518+165',' '
tvinit
go
source '0134+329',' '
tvinit
go
source '0420+417',' '
tvinit
go
source '3C129',' '
tvinit
go
bparm 0
```

Raw numbers

```
task 'listr'
optype 'list'
antenna 4,0
basel 0
sources '0518+165','0134+329','0420+417','3C129',' '
calcode '*'
bif 0
eif 0
docalib 0
stokes ' '
dparm 0
go

dparm 1 0
go
dparm 0
```

Flag some bad data. Just run the commands and think about this later.

```
task 'uvflg'
default
dohist 1
getn 7
antenna 4 0
basel 0
timer 101 4 0 50 101 4 5 0
stokes ' '
```

```
opcode 'flag'
reason 'bad ant
outfgver 1
go
```

Begin the calibration

Apply the flux densities for the known calibrators

```
task 'setjy'
default
getn 6
source '0518+165', ' '
bif 0
eif 0
optype 'calc'
aparm(2) 3
go
```

```
vlb054> SETJY1: Task SETJY (release of 31DEC10) begins
vlb054> SETJY1: **WARNING: OPCODE=CALC AND FREQID = -1
vlb054> SETJY1: FREQID WILL BE RESET TO 1, CHECK YOUR RESULTS CAREFULLY
vlb054> SETJY1: A source model for this calibrator is available
vlb054> SETJY1: Consult the help file for CALRD for assistance
vlb054> SETJY1: / Flux calculated using known spectrum
vlb054> SETJY1: BIF = 1 EIF = 2 /Range of IFs
vlb054> SETJY1: '0518+165 ' IF = 1 FLUX = 3.7742 (Jy calcd)
vlb054> SETJY1: '0518+165 ' IF = 2 FLUX = 3.9464 (Jy calcd)
vlb054> SETJY1: / Using (1995.2) VLA or Reynolds (1934-638) coefficients
vlb054> SETJY1: Appears to have ended successfully
vlb054> SETJY1: vlb054 31DEC10 TST: Cpu= 0.0 Real= 0
```

```
bif 1
eif 1
optype ' '
zerosp 3.7742, 0.380, -0.153, 0.0
go
bif 2
eif 2
zerosp 3.9464, 0.397, -0.161, 0.0
go
```

```
bif 0
eif 0
zerosp 0
optype 'calc'
source = '0134+329', ' '
```

go

```
vlb054> SETJY1: Task SETJY (release of 31DEC08) begins
vlb054> SETJY1: **WARNING: OPCODE=CALC AND FREQID = -1
vlb054> SETJY1: FREQID WILL BE RESET TO 1, CHECK YOUR RESULTS CAREFULLY
vlb054> SETJY1: A source model for this calibrator may be available
vlb054> SETJY1: Use the verb CALDIR to see if there is one
vlb054> SETJY1: A source model for this calibrator may be available
vlb054> SETJY1: Use the verb CALDIR to see if there is one
vlb054> SETJY1: / Flux calculated using known spectrum
vlb054> SETJY1: BIF = 1 EIF = 2 /Range of IFs
vlb054> SETJY1: '0134+329 ' IF = 1 FLUX = 5.4891 (Jy calcd)
vlb054> SETJY1: '0134+329 ' IF = 2 FLUX = 5.8249 (Jy calcd)
vlb054> SETJY1: / Using (1995.2) VLA or Reynolds (1934-638) coefficients
vlb054> SETJY1: Appears to have ended successfully
vlb054> SETJY1: vlb054 31DEC08 TST: Cpu= 0.0 Real= 0
```

Run the calibration for 3C138

```
task 'calib'
default
getn 13
calsour '0518+165', ' '
uvrange 0
antenna 0
refant 4
minamper 10
minphser 10
weightit 1
get2n 6
ncomp 0
solmode 'A&P'
aparm(6) 2
solint 2
solsub 2
cparm(3) 10
cparm(4) 10
go
clrmsg
```

Calibrate the phase calibrator

```
clr2n
calsour '0420+417', ' '
solint 0
uvrange 0
go
clrmsg
```

Check the results

```
task 'snplt'  
antenna 0  
stokes ' '  
inext 'sn'  
inver 1  
sources ' '  
timer 0  
optype 'amp'  
opcode 'alsi'  
do3col 1  
dotv 1  
nplots 9  
tvinit  
go  
optype 'phas'  
go  
inver 2  
optype 'amp'  
go  
optype 'phas'  
go
```

Use the amplitude calibrator to get the phase calibrator flux density

```
task 'getjy'  
sources '0420+417', ' '  
calsour '0518+165', ' '  
calcode ' '  
bif 0  
eif 0  
antenna 0  
timer 0  
snver 0  
go
```

```
vlb054> GETJY1: Task GETJY (release of 31DEC08) begins\\  
vlb054> GETJY1: Source:Qual CALCODE IF Flux (Jy)  
vlb054> GETJY1: 0420+417 : 3 B 1 1.33893 +/- 0.00641  
vlb054> GETJY1: 2 1.34714 +/- 0.00525  
vlb054> GETJY1: Appears to have ended successfully  
vlb054> GETJY1: vlb054 31DEC08 TST: Cpu= 0.0 Real= 0
```

Redo the phase calibrator calibration

Now that we know the flux density of the phase calibrator, run through its calibration again, just to be sure AIPS doesn't have some information left around from calibrating before with an unknown flux density.

```
inext 'sn'  
inver 2  
extdest  
inver 0  
tget calib  
go  
clrmsg
```

Apply the calibration to all sources

```
task 'clcal'  
sources '0518+165','0420+417','3C129',' '  
calsour '0518+165','0420+417',' '  
opcode 'cali'  
gainver 1  
gainuse 2  
refant 4  
interp '2pt'  
doblank 1  
go
```

Check the results

Plots

```
task 'uvplt'  
docalib 1  
gainuse 2  
source '0420+417',' '  
stokes 'half'  
aparm 0  
bparm 0 1  
doweight 1  
uvrange 0  
tvinit  
go
```

Now start the polarization calibration

Check the parallactic angles

```
task 'litr'  
sources '0518+165','0420+417', ' '  
inext 'cl'  
inver 2  
optype 'gain'  
dparm 9,0  
go
```

Make a backup of calibration information

```
task 'tasav'  
clro  
go
```

Run the polarization calibration on the phase calibrator

```
task 'pcal'  
calsour '0420+417', ' '  
timer 0  
antenna 0  
uvrange 0  
bif 0  
eif 0  
docalib 1  
gainuse 2  
clr2n  
pmodel 0  
solint 3  
soltype 'appr'  
prtlev 1  
refant 4  
bparm 0  
cparm 0  
go  
clrmsg
```

```
vlb054> PCAL 1: Calibration source    1  
vlb054> PCAL 1:   Q+iU=(   0.00444,  -0.04706) +/- (   0.000273,   0.000273)  
Jy  
vlb054> PCAL 1:   Pol. inten. =   0.04727 +/-   0.000386 Jy, angle = -42.30  
+/-  
vlb054>           0.165 deg  
vlb054> PCAL 1: 0420+417           I,Q,U,V =   1.3389   0.00444 -0.04706  
0.00000 J
```

```

vlb054>          y
vlb054> PCAL 1: Calibration source    1
vlb054> PCAL 1:  Q+iU=(  0.02002,  0.03901) +/- (  0.000277,  0.000277)
Jy
vlb054> PCAL 1:  Pol. inten. =  0.04385 +/-  0.000392 Jy, angle =  31.42
+/-
vlb054>          0.181 deg
vlb054> PCAL 1: 0420+417          I,Q,U,V =  1.3471  0.02002  0.03901
0.00000 J
vlb054>          y

```

Check the phase difference between polarizations on a polarization calibrator

```

task 'rldif'
source '0518+165', ' '
timer 0
antenna 0
uvrange 0,45
docalib 1
gainuse 2
dopol true
go

```

outputs

```

AIPS 1: RLDIF: Task to return Right - Left phase difference
AIPS 1: Adverbs      Values                      Comments
AIPS 1: -----
AIPS 1: CLCORPRM    132.6554    -74.984    R-L phase difference returned
AIPS 1:              *rest 0

```

Make backups again

```

task 'tasav'
clro
go

```

Find out what the polarization angle on the sky is supposed to be

Polarization data for C band from <http://www.vla.nrao.edu/astro/calib/polar/1999/>

Correct number is -21.71

Correct the measured values

```

for i=1 to 2;clcorp(i) = -21.71 - clcorp(i);end

```

Apply the corrections

```
task 'clcor'  
source ' '  
antenna 0  
timer 0  
bif 0  
eif 0  
gainver 2  
gainuse 0  
opcode 'polr'  
stokes 'l'  
go
```

Check that the angles are now correct

```
task 'rldif'  
source '0518+165', ' '  
timer 0  
antenna 0  
uvrange 0,45  
docalib 1  
gainuse 3  
dopol true  
go
```

outputs

```
AIPS 1: RLDIF: Task to return Right - Left phase difference  
AIPS 1: Adverbs      Values                               Comments  
AIPS 1: -----  
AIPS 1: CLCORPRM    -21.71          -21.71      R-L phase difference returned  
AIPS 1:              *rest 0
```

#####

Work on just the target data now

Run SPLIT on the two datasets

```
task 'split'  
getn 4  
source '3C129', ' '  
timer 0  
bif 0
```

```

eif 0
docalib 1
gainuse 3
dopol true
stokes ' '
douvcomp false
aparm 0
go
getn 13
go
clrmsg

```

Check for where the new datafiles are stored

```
pcat
```

```

AIPS 1: Catalog on disk 1
AIPS 1:  Cat Usid Mapname      Class   Seq  Pt      Last access      Stat
AIPS 1:   1   101 19940725     .C BAND.    1  UV  13-NOV-2008 17:24:12
AIPS 1:   2   101 19940725     .X BAND.    1  UV  13-NOV-2008 17:24:13
AIPS 1:   3   101 19940725     .X BAND.    2  UV  13-NOV-2008 17:24:13
AIPS 1:   4   101 19940725     .C BAND.    2  UV  13-NOV-2008 18:24:07
AIPS 1:   5   101 19940725     .U BAND.    1  UV  13-NOV-2008 17:24:13
AIPS 1:   6   101 3C138_C      .MODEL .    1  MA  13-NOV-2008 17:51:33
AIPS 1:   7   101 3C48_C      .MODEL .    1  MA  13-NOV-2008 16:19:09
AIPS 1:   8   101 19940725     .TASAV .    1  UV  13-NOV-2008 17:24:13
AIPS 1:   9   101 19940725     .TASAV .    2  UV  13-NOV-2008 17:24:13
AIPS 1:  10   101 19941103     .C BAND.    1  UV  13-NOV-2008 17:24:36
AIPS 1:  11   101 19941103     .X BAND.    1  UV  13-NOV-2008 17:24:36
AIPS 1:  12   101 19941103     .X BAND.    2  UV  13-NOV-2008 17:24:36
AIPS 1:  13   101 19941103     .C BAND.    2  UV  13-NOV-2008 18:24:18
AIPS 1:  14   101 19941103     .TASAV .    1  UV  13-NOV-2008 17:54:20
AIPS 1:  15   101 19941103     .TASAV .    2  UV  13-NOV-2008 17:56:30
AIPS 1:  16   101 3C129       .SPLIT .    1  UV  13-NOV-2008 18:24:07
AIPS 1:  17   101 3C129       .SPLIT .    2  UV  13-NOV-2008 18:24:18

```

Combine the two different observations into one big one

```

task 'dbcon'
getn 16
get2n 17
go
pcat

```

```

AIPS 1:   18   101 3C129       .DBCON .    1  UV  13-NOV-2008 18:28:31

```

Imaging

IMAGR is the standard imaging tool for AIPS

This will start up an imaging/cleaning session. Draw boxes and clean the source structure. Do this for all 4 Stokes parameters. (Unfortunately, IMAGR requires separate runs for the different Stokes parameters.)

```
task 'imagr'  
getn 18  
stokes 'i'  
dopol 0  
cellsize 0.25,0.25  
imsize 2048,2048  
clr2n  
do3dimag 1  
docalib 0  
uvrange 0  
niter 20000  
overlap 1  
go  
clrmsg  
stokes 'q'  
go  
clrmsg  
stokes 'u'  
go  
clrmsg  
stokes 'v'  
go  
clrmsg
```

Check where the files went

pcat

AIPS 1:	29	101	3C129	.IBM001.	3	MA	13-NOV-2008	19:46:00
AIPS 1:	30	101	3C129	.ICL001.	5	MA	13-NOV-2008	19:46:00
AIPS 1:	31	101	3C129	.QBM001.	1	MA	13-NOV-2008	19:47:30
AIPS 1:	32	101	3C129	.QCL001.	1	MA	13-NOV-2008	19:47:30
AIPS 1:	33	101	3C129	.UBM001.	1	MA	13-NOV-2008	19:49:06
AIPS 1:	34	101	3C129	.UCL001.	1	MA	13-NOV-2008	19:49:06
AIPS 1:	35	101	3C129	.VBM001.	1	MA	13-NOV-2008	19:49:39
AIPS 1:	36	101	3C129	.VCL001.	1	MA	13-NOV-2008	19:49:39

Polarization images

Combine Q and U to get linear polarization

```
task 'comb'
opcode 'polc'
getn 32
get2n 34
aparm 0
bparm(1) 28E-6
bparm(2) 28E-6
go
```

Get the linear polarization angle

```
opcode 'pola'
go
```

Check where file went

```
pcat
```

AIPS 1:	28	101	3C129	.PPOLC	.	1	MA	13-NOV-2008	19:59:45
AIPS 1:	37	101	3C129	.PANG	.	1	MA	13-NOV-2008	20:00:28

Look at the images

Linear Polarization

```
getn 28
tvinit
tvlod
tvfiddle
tvstat
```

AIPS 1:	Mean=	1.3417E-05	rms=	2.8180E-05	JY/BEAM	over	178694.	pixels
---------	-------	------------	------	------------	---------	------	---------	--------

Polarization Angle

```
getn 37
tvinit
tvlod
tvfiddle
```

I

```
getn 30
tvinit
tvlod
tvfiddle
tvstat
```

Clip the data so we only see information where there is good S/N

```
task 'comb'
getn 37
get2n 28
opcode 'clip'
aparm(1) 100E-6
aparm(10) 100E-6
bparm 0
outclass 'PANGC'
go
task 'comb'
getn 28
get2n 28
opcode 'clip'
aparm(1) 100E-6
aparm(10) 100E-6
bparm 0
outclass 'POLCC'
go
```

Check where these files went

pcat

AIPS 1:	38	101	3C129	.PANGC .	1	MA	13-NOV-2008	20:31:21
AIPS 1:	39	101	3C129	.POLCC .	1	MA	13-NOV-2008	20:31:21

Look at the polarization angle

```
getn 38
tvinit
tvlod
tvfiddle
```

Plotting your data



Plot I contours and P greyscale

```
task 'kntr'  
getn 30  
get2n 28  
docont 1  
dogrey 2  
dovect 0  
pixrange 0 1E-3  
clev 28E-6  
levs=-16,-8,8,16,32,64,128,256,512,1024  
dowedge true  
cbplot 1  
dotv 1  
blc 950 950  
trc 1500 1500  
go
```

Plot I contours and colors for polarization angle

```
task 'pcntr'  
getn 30  
get2n 32  
get3n 34  
docont 1  
dogrey 2  
dovect 1  
pixrange 0 1E-3  
clev 28E-6  
levs=-16,-8,8,16,32,64,128,256,512,1024  
factor 5  
pol3col 1  
pcut 80E-6  
icut 0  
dowedge 0  
cbplot 1  
dotv 1  
blc 950 950  
trc 1500 1500  
go
```

Final Images

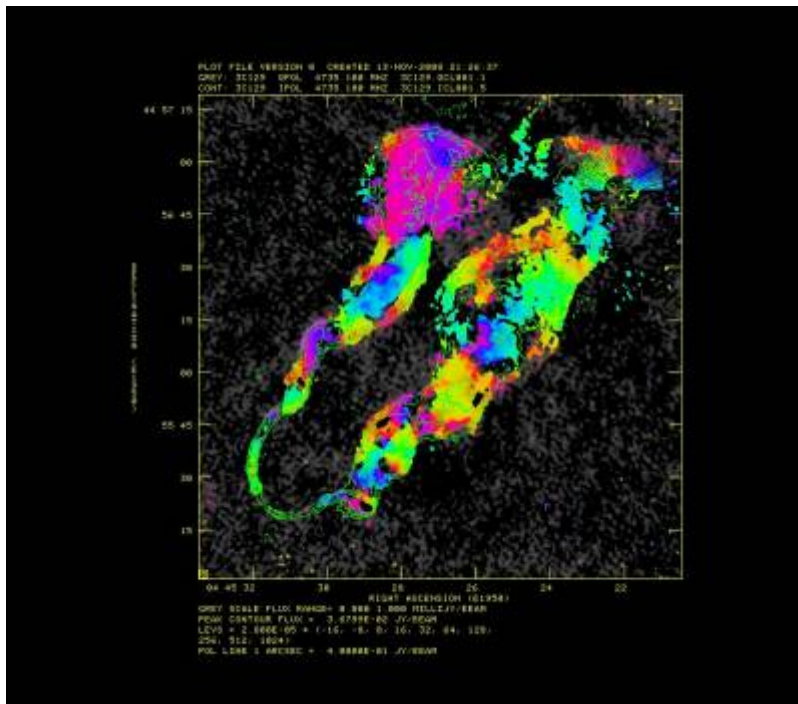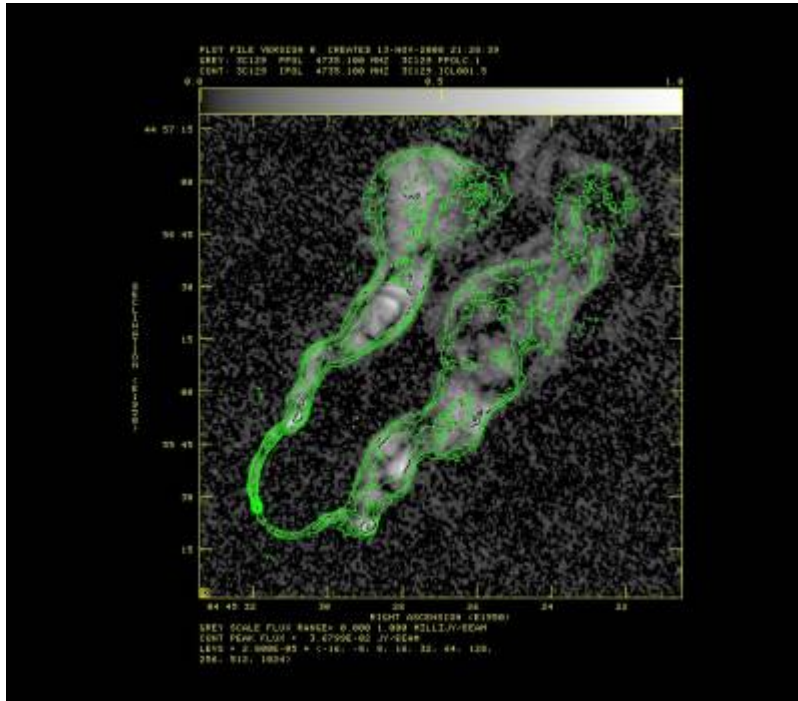

From:
<https://www.astron.nl/lofarwiki/> - **LOFAR Wiki**

Permanent link:
https://www.astron.nl/lofarwiki/doku.php?id=public:meetings:glowbi2008:tutorial_wednesday&rev=1289934707

Last update: **2010-11-16 19:11**

